


## Use of technologies comparison

■ Our philosophy of construction

■ Medium low quality construction philosophy

|   | Maintenance Product                                      | Best comfort | Energy saving | Healthiness dwelling | More costs in % | Initial cost | Maintenance in years |      |      |      |      |      |      |      |      |
|---|--|--------------|---------------|----------------------|-----------------|--------------|----------------------|------|------|------|------|------|------|------|------|
|   |  |              |               |                      |                 |              | 5                    | 10   | 15   | 20   | 25   | 30   | 35   | 40   | 45   |
| 1 | Ventilated floor underground (solution against moisture) | x            |               | x                    | 30%             | 130%         | 130%                 | 130% | 130% | 130% | 130% | 130% | 130% | 130% | 260% |
|   | Traditional floor underground                            |              |               |                      |                 | 100%         | 110%                 | 125% | 180% | 190% | 215% | 300% | 310% | 325% | 400% |

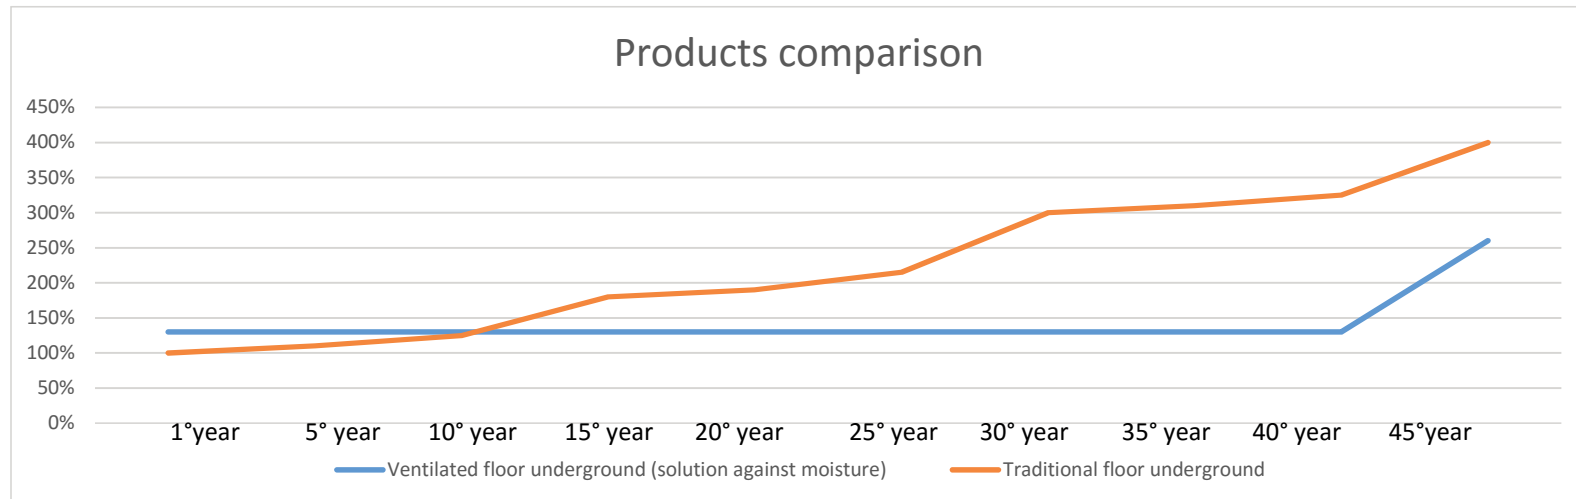


## Use of technologies comparison

■ Our philosophy of construction

■ Medium low quality construction philosophy

|   | Maintenance Product  | Best comfort | Energy saving | Healthiness dwelling | More costs in % | Initial cost | Maintenance in years |      |      |      |      |      |      |      |      |
|---|--|--------------|---------------|----------------------|-----------------|--------------|----------------------|------|------|------|------|------|------|------|------|
|   |  |              |               |                      |                 |              | 5                    | 10   | 15   | 20   | 25   | 30   | 35   | 40   | 45   |
| 2 | Prefure systeme for underground (solution for underwater protection) | x            |               | x                    | 20%             | 120%         | 120%                 | 120% | 120% | 120% | 140% | 140% | 160% | 160% | 200% |
|   | NO protection for underground floor                                  |              |               |                      |                 | 100%         | 100%                 | 150% | 160% | 200% | 200% | 250% | 260% | 300% | 310% |

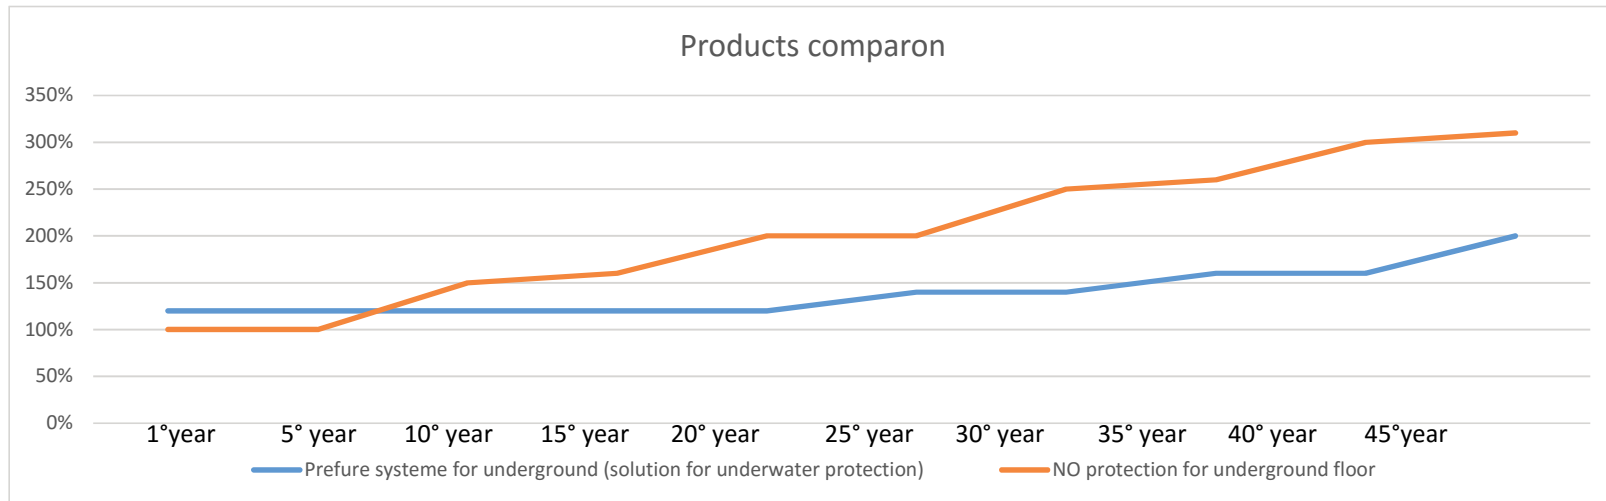


## Use of technologies comparison

■ Our philosophy of construction

■ Medium low quality construction philosophy

| Maintenance Product | Best comfort  | Energy saving | Healthiness dwelling | More costs in % | Initial cost | Maintenance in years |      |      |      |      |      |      |      |      |      |
|---------------------|---|---------------|----------------------|-----------------|--------------|----------------------|------|------|------|------|------|------|------|------|------|
|                     |   |               |                      |                 |              | 5                    | 10   | 15   | 20   | 25   | 30   | 35   | 40   | 45   |      |
| 3                   | Prefure for foundation (solution for underwater protection) | x             |                      | x               | 20%          | 120%                 | 120% | 120% | 120% | 120% | 140% | 140% | 160% | 160% | 200% |
|                     | NO foundation protection                                    |               |                      |                 | 100%         | 100%                 | 150% | 160% | 200% | 200% | 250% | 260% | 300% | 310% |      |

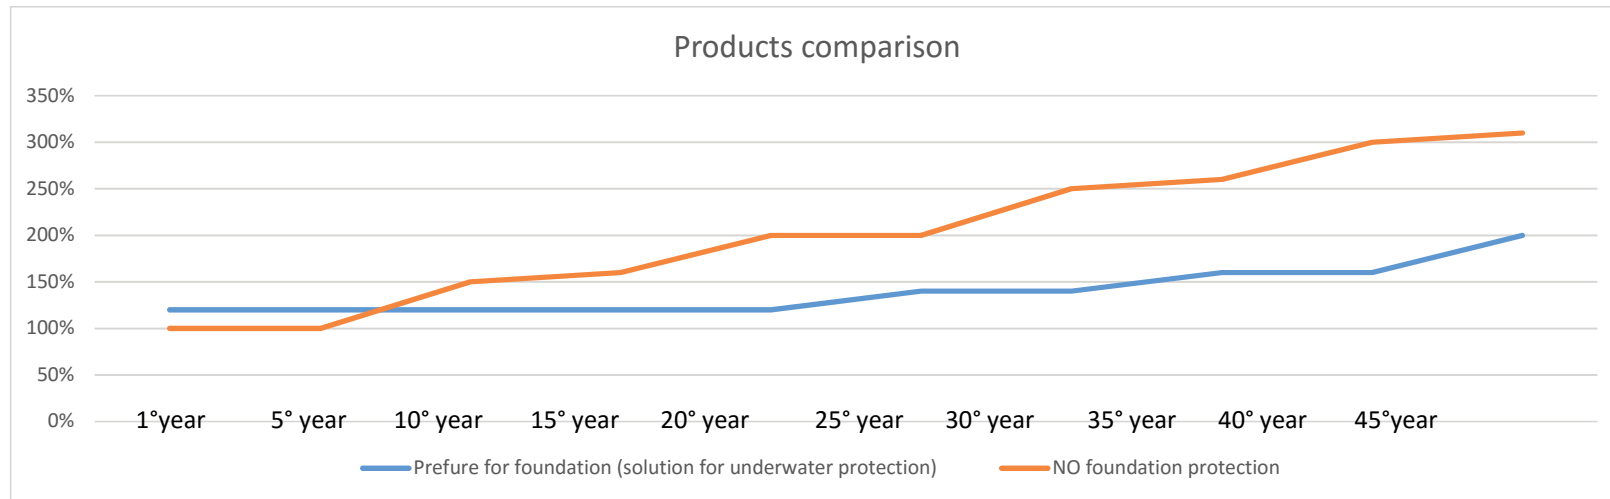


## Use of technologies comparison

■ Our philosophy of construction

■ Medium low quality construction philosophy

| Maintenance Product | Best comfort                                | Energy saving | Healthiness dwelling | More costs in % | Initial cost | Maintenance in years |      |      |      |      |      |      |      |      |      |
|---------------------|---|---------------|----------------------|-----------------|--------------|----------------------|------|------|------|------|------|------|------|------|------|
|                     |   |               |                      |                 |              | 5                    | 10   | 15   | 20   | 25   | 30   | 35   | 40   | 45   |      |
| 4                   | Ventilated wall (solution against the heat) | x             | x                    | x               | 30%          | 130%                 | 130% | 130% | 130% | 130% | 150% | 150% | 160% | 160% | 200% |
|                     | Normal external wall                        |               |                      |                 | 100%         | 100%                 | 150% | 160% | 200% | 200% | 250% | 260% | 300% | 310% |      |

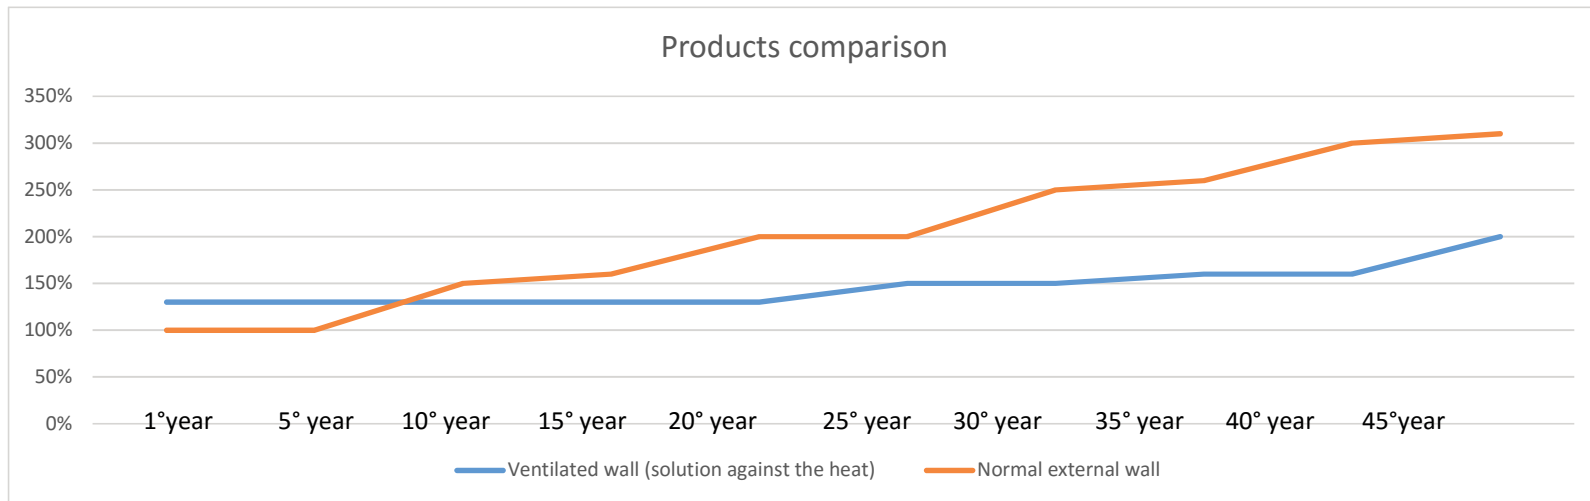


## Use of technologies comparison

■ Our philosophy of construction

■ Medium low quality construction philosophy

|   | Maintenance Product                         | Best comfort | Energy saving | Healthiness dwelling | More costs in % | Initial cost | Maintenance in years |      |      |      |      |      |      |      |      |
|---|---|--------------|---------------|----------------------|-----------------|--------------|----------------------|------|------|------|------|------|------|------|------|
|   |   |              |               |                      |                 |              | 5                    | 10   | 15   | 20   | 25   | 30   | 35   | 40   | 45   |
| 5 | Ventilated roof (solution against the heat) | <b>x</b>     | <b>x</b>      | <b>x</b>             | 35%             | 135%         | 135%                 | 135% | 135% | 150% | 150% | 170% | 170% | 180% | 220% |
|   | Normal roof                                 |              |               |                      |                 | 100%         | 110%                 | 150% | 160% | 200% | 210% | 250% | 260% | 300% | 310% |

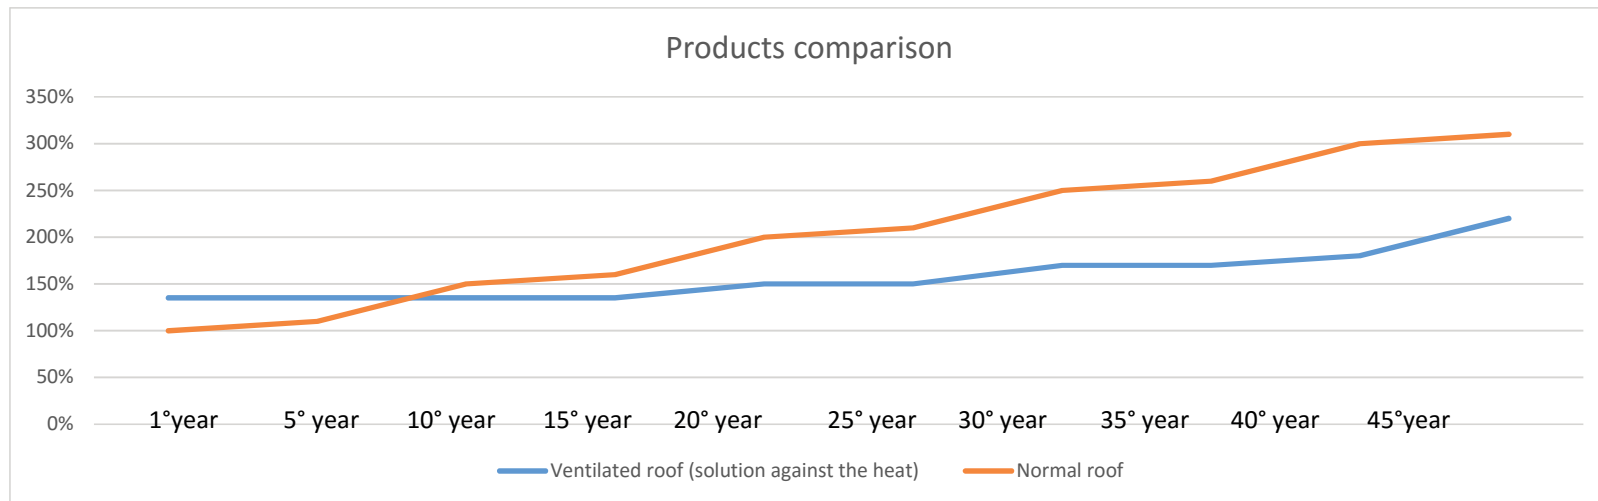


## Use of technologies comparison

■ Our philosophy of construction

■ Medium low quality construction philosophy

| Maintenance Product  | Best comfort | Energy saving | Healthiness dwelling | More costs in % | Initial cost | Maintenance in years |      |      |      |      |      |      |      |      |      |
|--|--------------|---------------|----------------------|-----------------|--------------|----------------------|------|------|------|------|------|------|------|------|------|
|  |              |               |                      |                 |              | 5                    | 10   | 15   | 20   | 25   | 30   | 35   | 40   | 45   |      |
| 6 <span style="background-color: #4F81BD; color: white;">Glazed porcelanaded floor (perfect shock resistance)</span> | <b>x</b>     | <b>x</b>      | <b>x</b>             | 50%             | 150%         | 150%                 | 150% | 150% | 150% | 150% | 150% | 150% | 300% | 300% | 300% |
| <span style="background-color: #E69A00;">Normal tile for floor</span>  |              |               |                      |                 | 100%         | 135%                 | 200% | 235% | 300% | 335% | 400% | 435% | 500% | 535% |      |

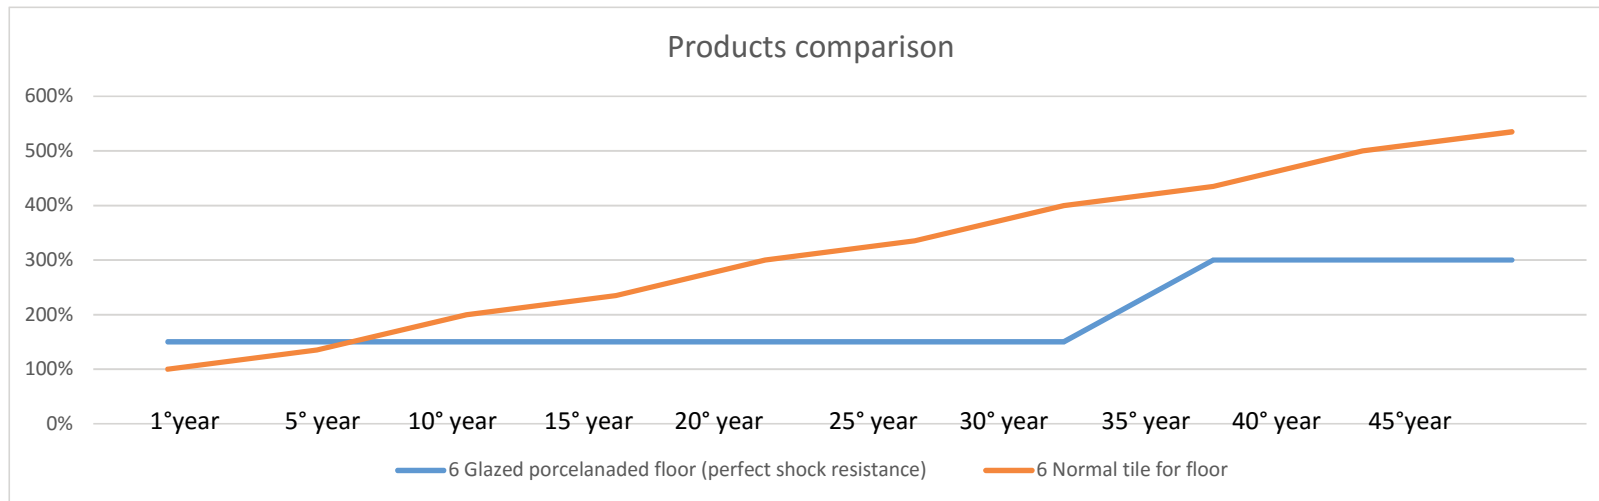

## Use of technologies comparison

  Our philosophy of construction

  Medium low quality construction philosophy

| Maintenance Product | Best comfort | Energy saving | Healthiness dwelling | More costs in % | Initial cost | Maintenance in years |      |      |      |      |      |      |      |      |      |
|---------------------|--------------|---------------|----------------------|-----------------|--------------|----------------------|------|------|------|------|------|------|------|------|------|
|                     |              |               |                      |                 |              | 5                    | 10   | 15   | 20   | 25   | 30   | 35   | 40   | 45   |      |
| 7                   | x            | x             |                      | 40%             | 140%         | 140%                 | 140% | 140% | 140% | 140% | 180% | 180% | 180% | 180% | 180% |
|                     |              |               |                      |                 | 100%         | 100%                 | 140% | 140% | 200% | 200% | 240% | 240% | 300% | 300% |      |



## Use of technologies comparison

■ Our philosophy of construction

■ Medium low quality construction philosophy

|   | Maintenance Product   | Best comfort | Energy saving | Healthiness dwelling | More costs in % | Initial cost | Maintenance in years |      |      |      |      |      |
|---|---|--------------|---------------|----------------------|-----------------|--------------|----------------------|------|------|------|------|------|
|   |   |              |               |                      |                 |              | 5                    | 10   | 15   | 20   | 25   | 30   |
| 8 | Radiant panel (new solution for using the air conditioning) | <b>x</b>     | <b>x</b>      |                      | 35%             | 135%         | 135%                 | 135% | 150% | 150% | 200% | 200% |
|   | Air conditioned traditional                                 |              |               |                      |                 | 100%         | 130%                 | 150% | 200% | 230% | 300% | 330% |

